



R2

L1


L2

R1/L1: ca. 160°
R2/L2: ca. 150°



L4

ca. 120°





EN 3 - EN 6

$$U_B : 24 \text{ V DC } \pm 15\%$$

I: 90 mA

100% ED

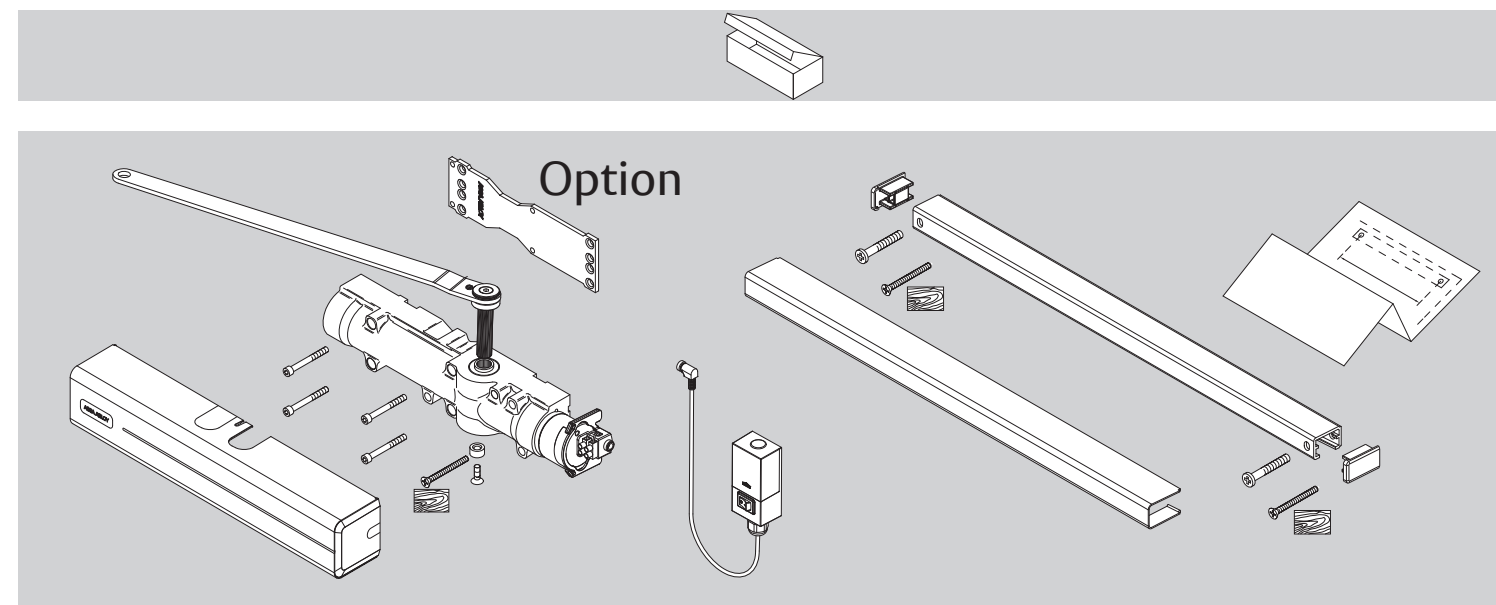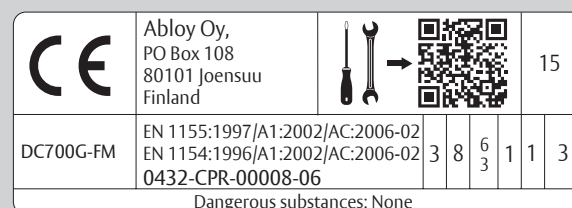

Option



R1

R2


R4

DIN L

L1

L2

L4

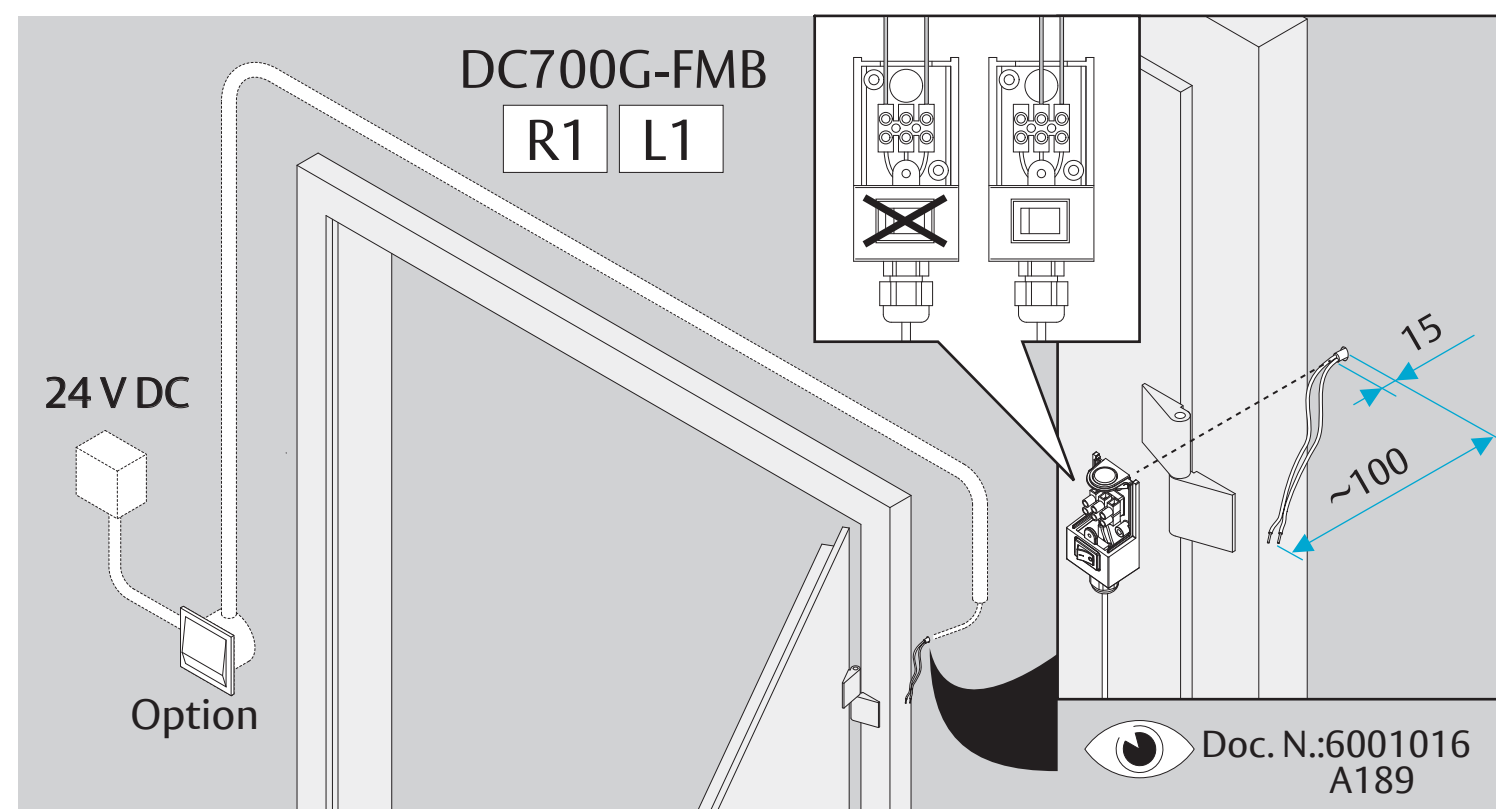

DC700G-FMB

















R1

L1

24 V DC

Option

 Doc. N.:6001016
A189

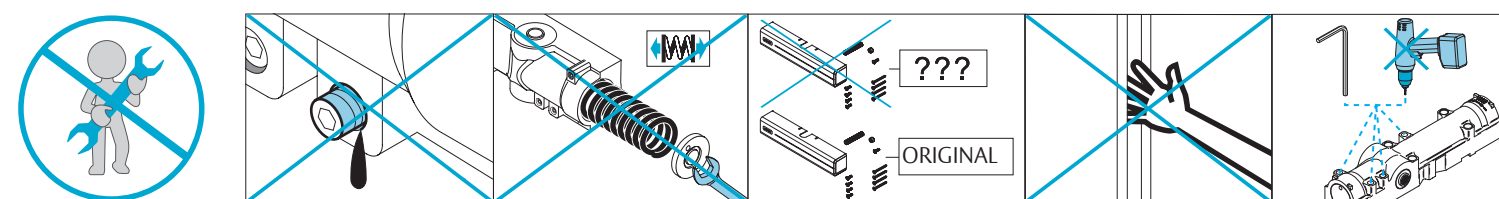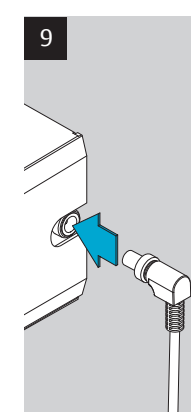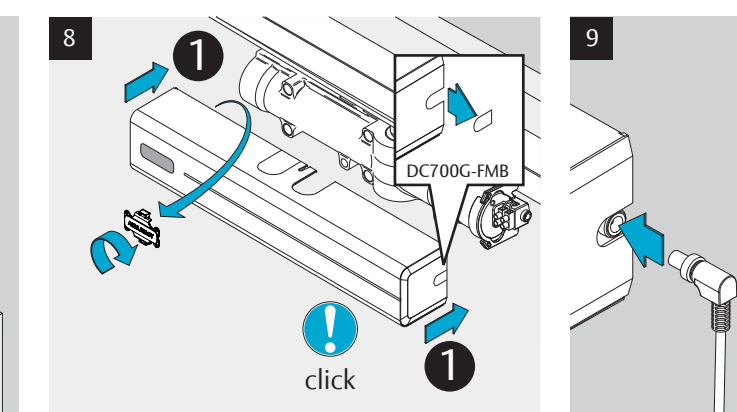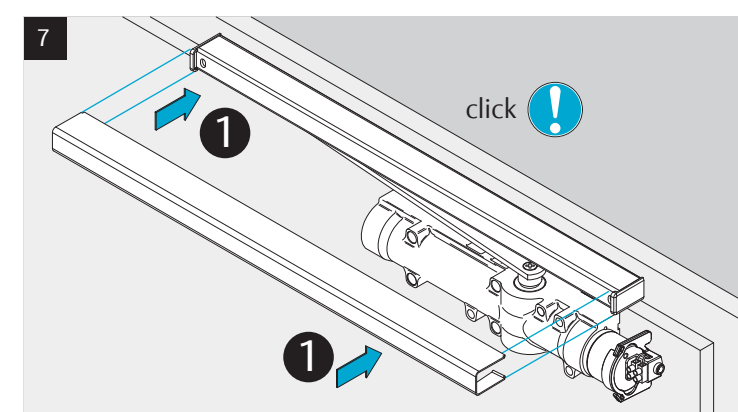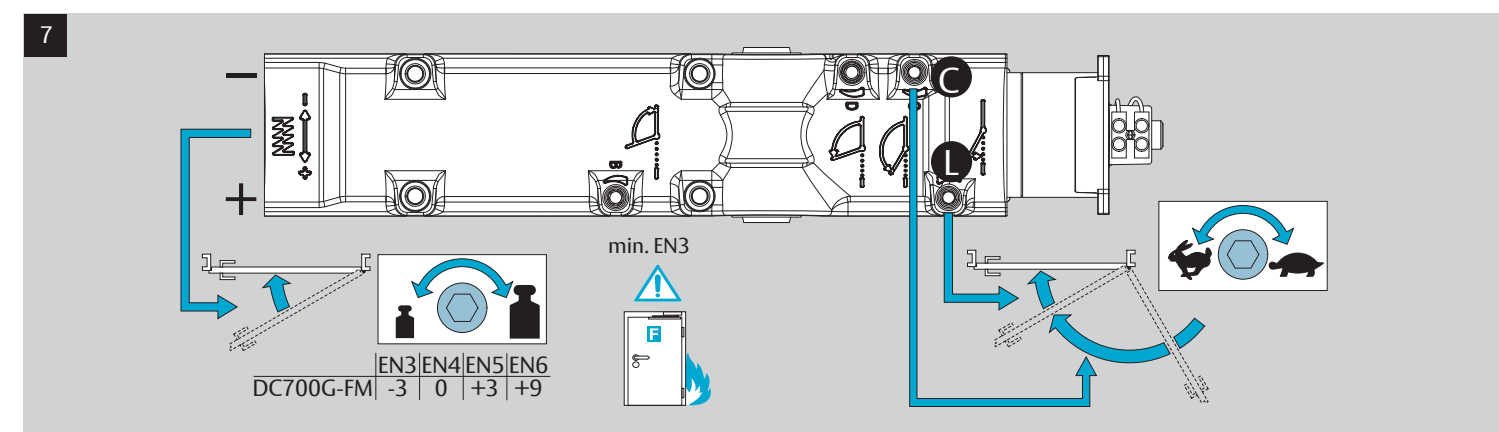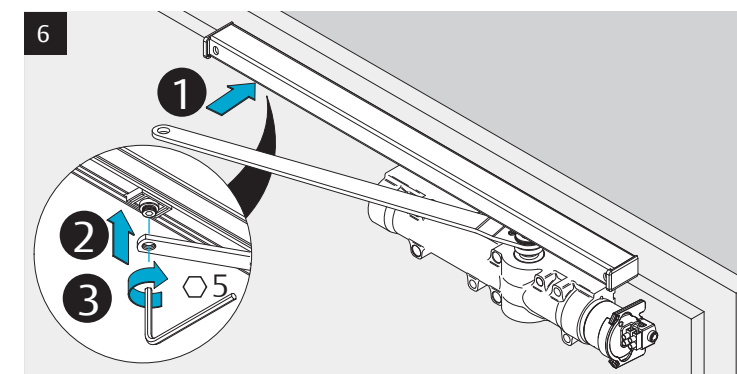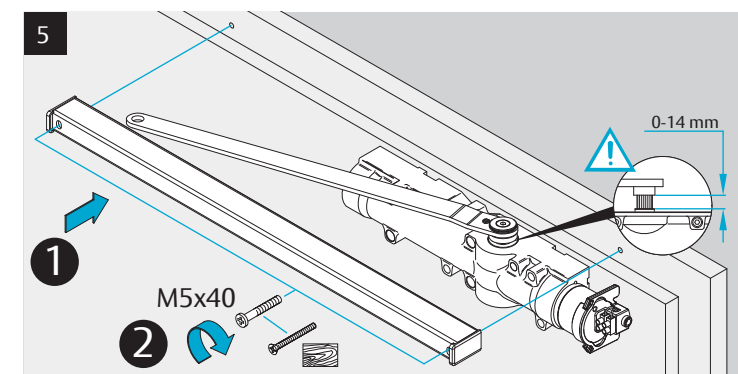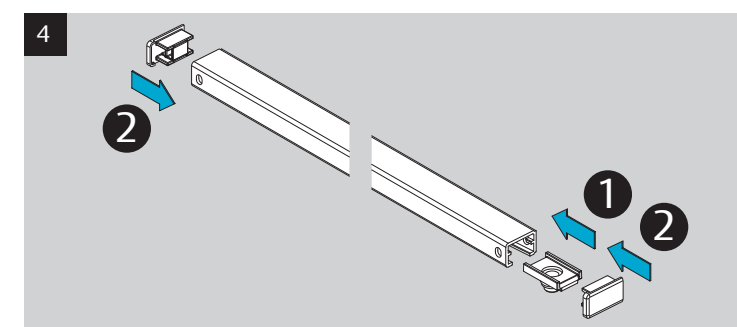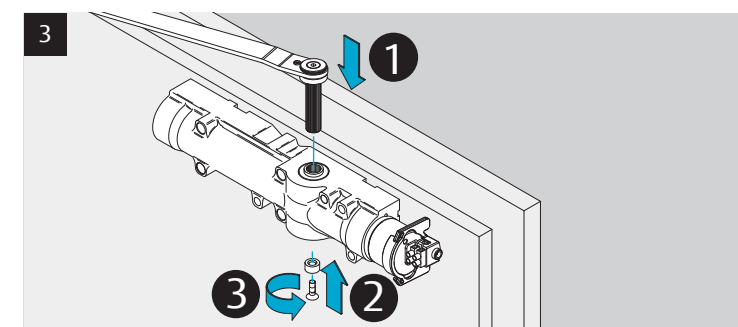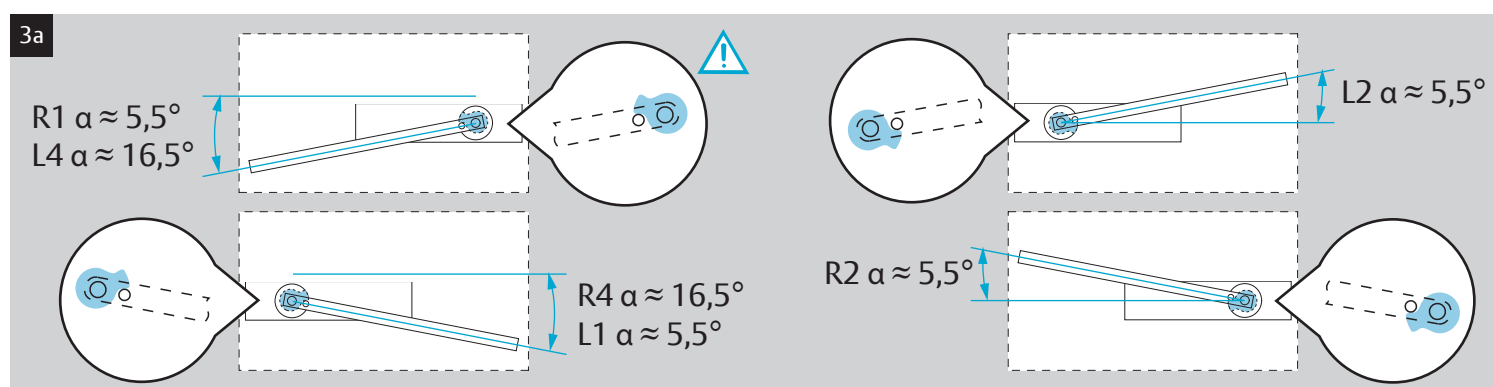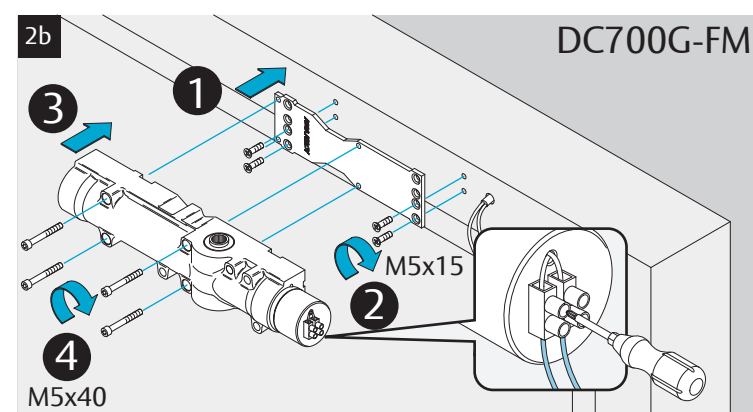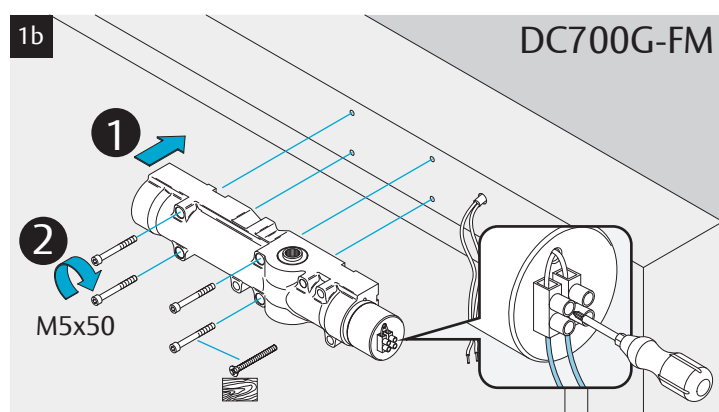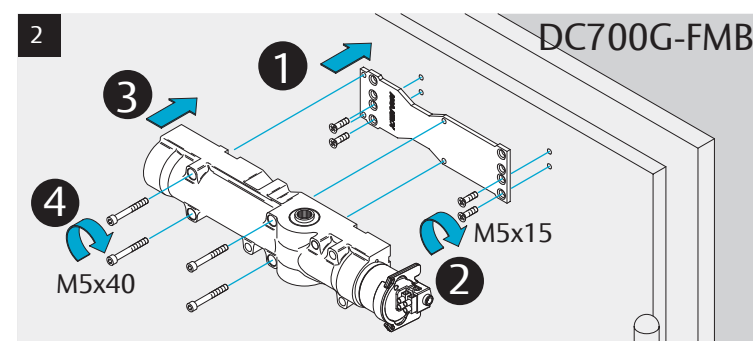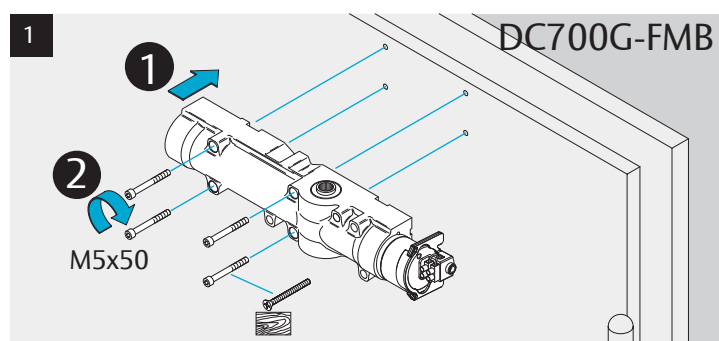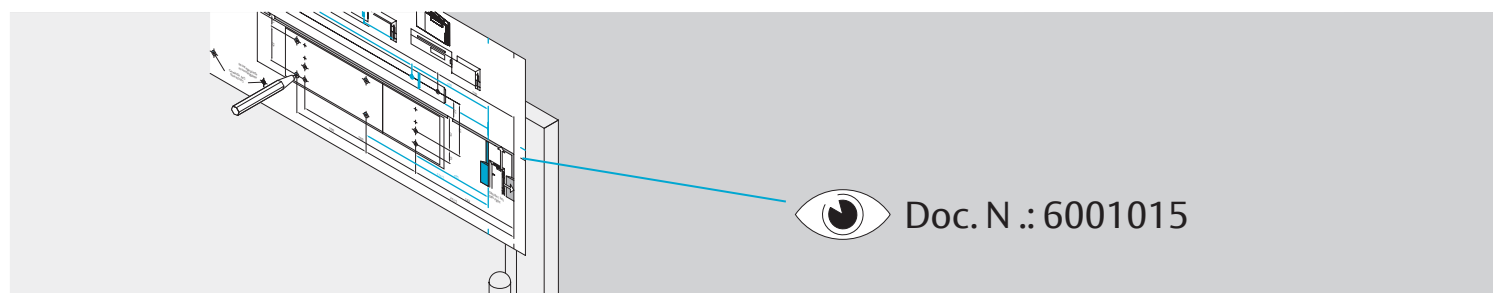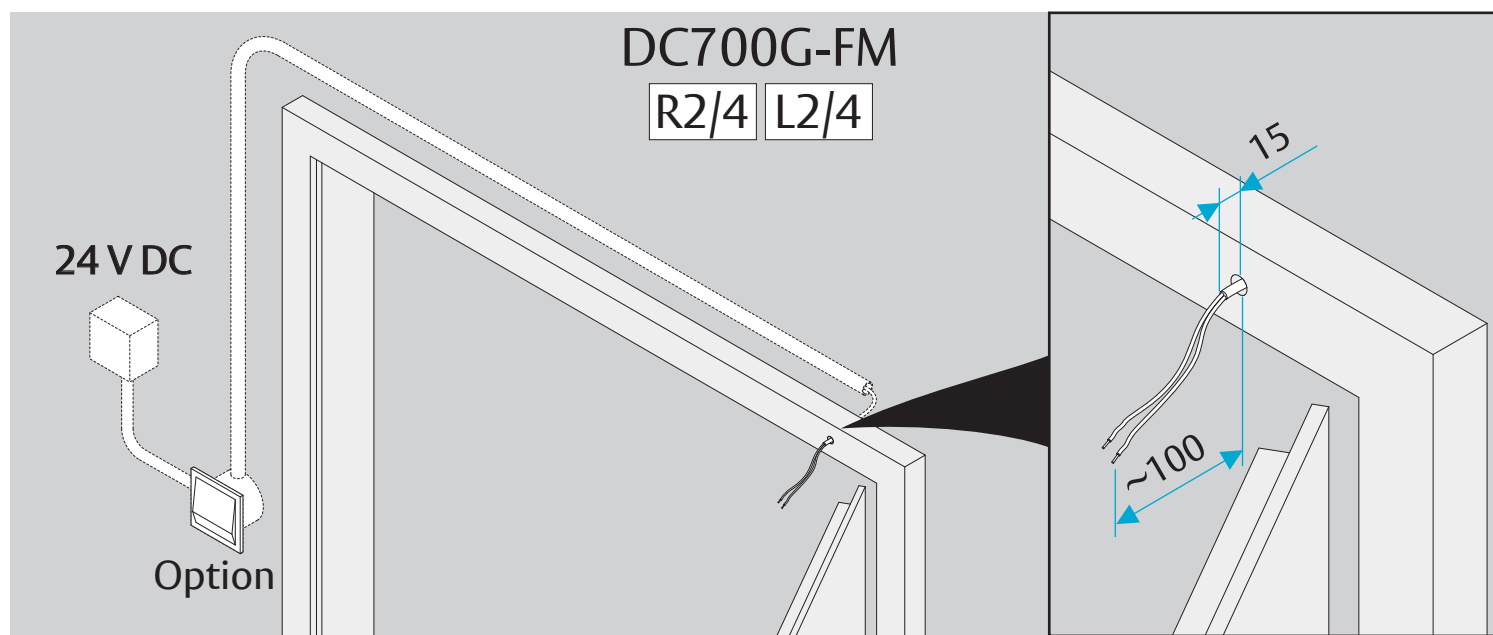

Abloy Oy
P.O.Box 108
80101 Joensuu
FINLAND
Tel.: +358-20 599 2501
Fax: +358-20 599 2209
www.assaabloy.com
www.abloy.com/dop

ASSA ABLOY

10.7.2019