

ASSA ABLOY Electric strikes 960 series

ASSA ABLOY
Opening Solutions

Heavy-duty electric strikes 960, 961, 960C, 961C



Applications

ASSA ABLOY Electric strikes in the 900 series are suitable for doors that must meet high demands on seal pressure/pre-load and standard security requirements. Suitable as a daytime lock in perimeter security and as an internal lock for retail, office and industrial premises, or entrances and common areas in apartment buildings.

Operation

ASSA ABLOY Electric strikes in the 960 series are available in two main types:

Fail-secure 960, 960C

- Automatically locks when current is switched off
- 960C for Hi-O™ Can bus

Fail-secure 961, 961C

- Automatically unlocks when current is switched off
- 961C for Hi-O™ Can bus

Features

Designed for use in doors in combination with dead-latched single or double-latch locks. Suitable for all faceplate in the 900 series.

Fail-locked Fire-rated

- Holding force 15KN
- Extremely impact-proof and shock-proof
- Housing made of steel
- Pivoting latch made of steel
- Opens even with high seal pressure/pre-load
- Latch bolt engagement monitoring
- Keeper deadlocking monitoring
- Fire-rated up to E/EI 120

Fail-safe



- Holding force 15KN
- Extremely impact-proof and shock-proof
- Housing made of steel
- Pivoting latch made of steel
- Opens even with high seal pressure/pre-load
- Latch bolt engagement monitoring
- Keeper deadlocking monitoring

ASSA ABLOY Electric strikes

960 series

ASSA ABLOY
Opening Solutions

Heavy-duty electric strikes 960, 961, 960C, 961C

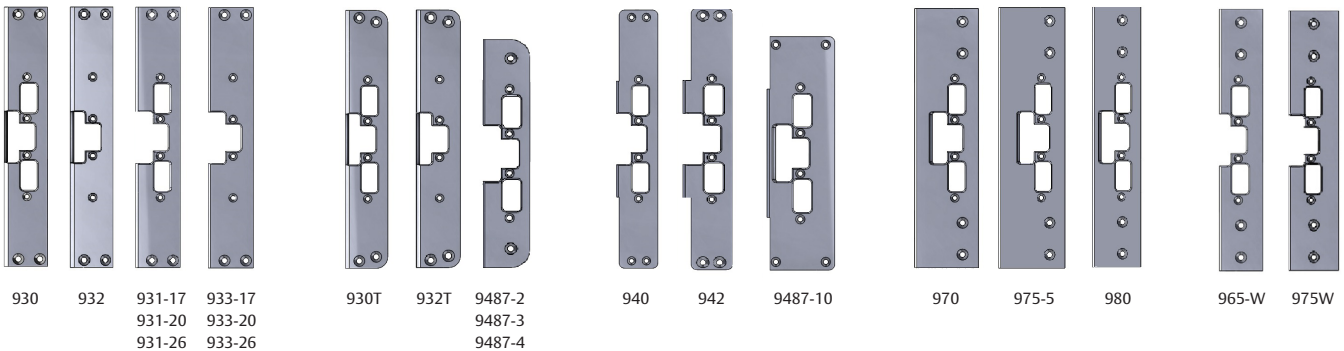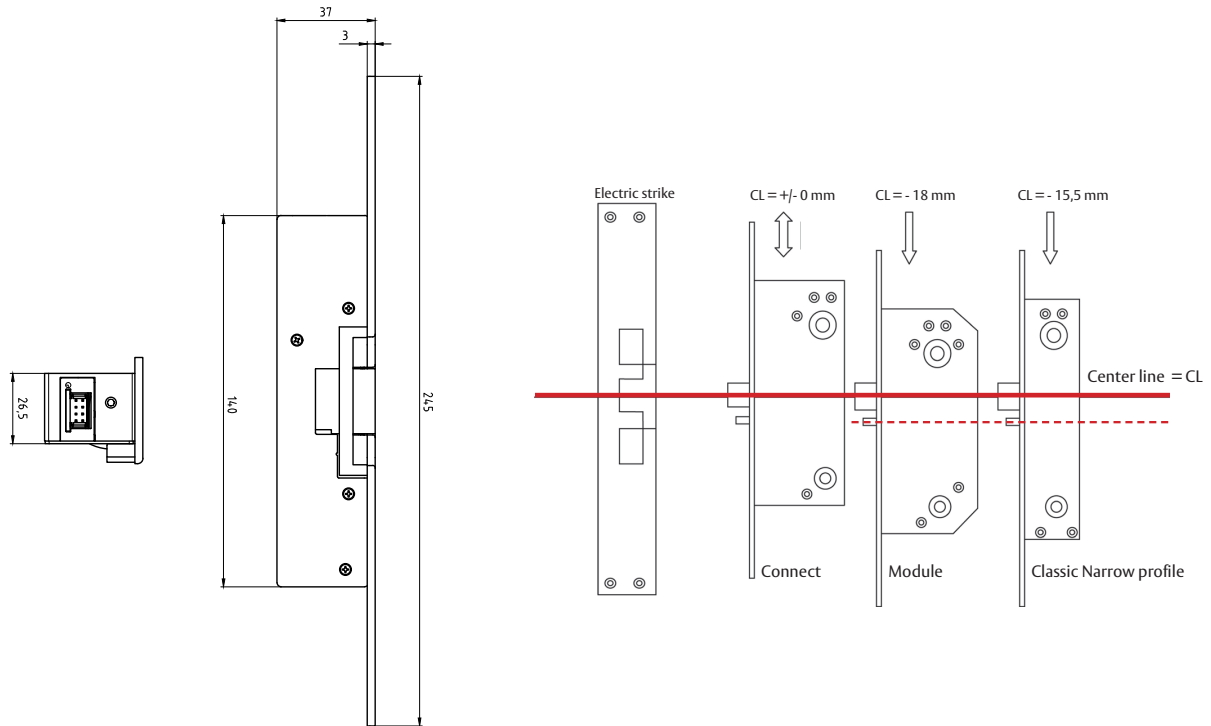

Technical data

ASSA ABLOY Electric strikes in the 960 series feature

- Built-in transient protection
- Power supply 12–24 VAC/DC -10%+15%
- Power supply (960C, 961C) 12–24V DC -10%+ 15%
- Starting current at 24 V 240 mA operation 145 mA
- Starting current at 12 V 620 mA operation 310 mA
- Supplied with 5 m connection cable with connector for connection to the strike

Accessories

Accessories for the ASSA ABLOY Electric strikes in the 960 series include several faceplates intended for different door environments in wood/steel and aluminum. The faceplates above show only a selection from the range.

ASSA ABLOY Opening Solutions Sweden AB
P.O. Box 371
SE-631 05 Eskilstuna
Sweden

Phone +46 (0)16 17 70 00
Fax +46 (0)16 17 70 49

Customer support:
Phone intl. +46 (0)16 17 71 00
Phone nat. 0771-640 640
Fax +46 (0)16 17 73 72

e-mail: helpdesk.se.openingsolutions@assaabloy.com
www.assaabloyopeningsolutions.se